

Ref. Code: AP0046

Date: June 2022




D Type Universal Valley Trough

Product Features

Corodrain valley troughs are a durable, economic alternative to lead. Corodrain D Type Valley includes 35mm wide sanded strips for mortar adhesion. Meets all the requirements for the standard valley troughs in NFRC Technical Bulletin 28.

- BBA Approved Cert No. 89/2153
- At least durable as lead
- Similar in appearance to lead
- Less prone to theft
- Quick to install
- UV light and acid rain resistant
- Smooth surface inhibits the growth of moss & lichen and build-up of debris
- Fire resistance to SAB to BS476 part 3 and Class 3 BS476 part 7

- Suitable for use on roofs with pitches from 17.5° to 55°
- Can accommodate a maximum difference between two rafter pitches of 15°
- Designed for use with interlocking tiles, they can also with natural slate and manufactured slate

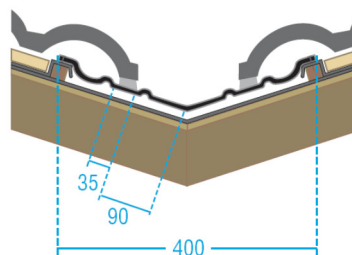

UNIVERSAL VALLEY HD/DX

Product specification	D type - Standard	DX type – Heavy Duty	DD type – Diamond 60 Weight
Length and Code	3m – HD30 , 2.4m – HD24 , 1.8m – HD18	3m – DX30 , 2.4m – DX24	3m – DD30
Width	410mm	410mm	410mm
Standard Weight	1.83Kg/m ²	2.4Kg/m ²	2.4Kg/m ²
Thickness	1mm	1.3mm	1.3mm
Colour	Grey/Blue	Grey/Blue	Grey/Blue
Material	GRP - High quality unfilled polyester resin with glass fibre reinforcement	GRP - High quality unfilled polyester resin with glass fibre reinforcement	GRP - High quality unfilled polyester resin with glass fibre reinforcement

Valley Selection Table

RAFTER PITCH (degrees)	ROOF AREA LESS THAN 25m ²		ROOF AREA 25 – 100m ²		MINIMUM LAP LENGTH
	VALLEY TYPE	MAX. VALLEY LENGTH	VALLEY TYPE	MAX. VALLEY LENGTH	
17.5 TO 22	B / D	7.0m	—	—	350mm
22.5 TO 29	A / B / D	7.0m	B / D	14.5m	300mm
30 TO 34	A / B / D	7.5m	B / D	15.0m	200mm
35 TO 39	A / B / D	7.5m	B / D	15.5m	200mm
40 TO 44	A / B / D	8.0m	B / D	16.5m	150mm
45 TO 49	A / B / D	8.5m	B / D	17.0m	150mm
50 TO 55	B / D	9.0m	B / D	18.5m	150mm