



Universal High Profile Dry Fix Valley 110mm upstand, for high profile tiles

DVU30HW110	Heavy Weight Dry Fix Valley
DVU30SW110	Standard Weight Dry Fix Valley

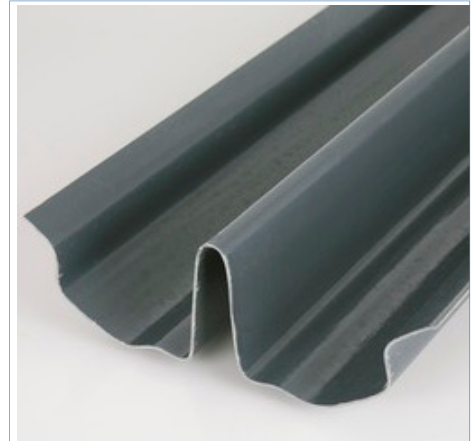

Product

- Mortar free, dry fix valley
- UV light and acid rain resistant
- Quick to install
- Similar in appearance to and at least as durable as lead
- Smooth surface inhibits the growth of moss & lichen and the build-up of debris
- Fire resistant to SAB to BS476 part 3
- Fire resistant to Class 3 to BS476 part 7

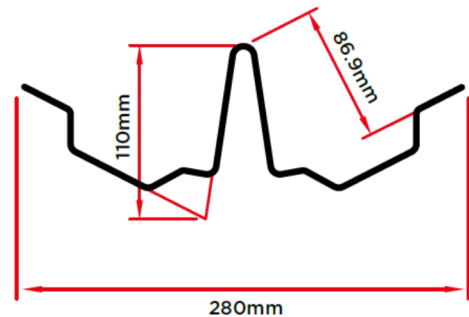

Installation

- Designed for use with low profile and plain tiles
- For use on roofs with pitches between 17.5° and 49°
- Can accommodate a maximum difference between two rafter pitches of 15°

Overlap Requirement

ROOF PITCH	LAP
17.5° - 22°	350mm
22.5° - 29°	300mm
30° - 39°	200mm
40° - 49°	150mm

Product Specifications	DVU30HW110 – Heavy weight	DVU30SW110 - Standard weight
Length	3M	3M
Width	280mm	280mm
Upstand Height	110mm	110mm
Standard Weight	2.4kg/m ²	1.65kg/m ²
Thickness	2mm	1.2mm
Colour	Grey/Blue	Grey/Blue
Material	GRP - High quality unfilled polyester resin with glass fibre reinforcement	GRP - High quality unfilled polyester resin with glass fibre reinforcement