

Ref. Code: AP010

Date: April 2016




## TV3N Ridgeline Vent

### Product Description

Corovent ridgeline vents provide discreet high level ventilation. Each vent is designed to replace one normal ridge tile. Vents can be matched to existing roof tiles on request. The TV3N is for free ventilation only and has no attachments.


- Large capacity provides 12,500mm<sup>2</sup> of ventilation
- Can be used as an outlet on most passive ventilation systems
- Unique design allows the vent to be fitted without cutting the ridge board in most cases
- Can be made to suit a wide range of ridge tiles (please check for availability)

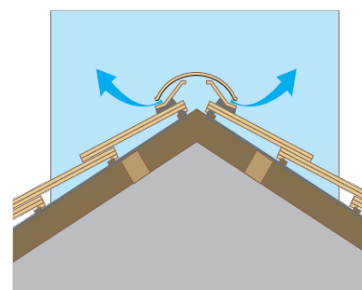

Vent	Vent Area	Type of Ridge Tile	Spacing to give continuous ventilation
TV3N	12,500mm <sup>2</sup>	Concrete and clay ridge tiles	5mm at 2.5M spacing

All vents are subjected to 3 separate wind and rain penetration tests and a deluge test to simulate extremely harsh weather, based on conditions developed as part of a DoE Partners in Technology Programme as used by Building Research Establishment (BRE). All vents exceed the pass criteria under all conditions.

<b>Product Requirements</b>	TV3N
<b>Statutory Requirements</b>	Conforms to B12056-2:2000 "Code of Practice for Sanitary Pipe Work" and BS5925:1991 (1995) "Code of Practice for Ventilation Principles and Designing Natural Ventilation"
<b>Ventilation Area</b>	12,500mm <sup>2</sup> for ridge vents over 300mm long, (shorter ridge vents will have a lower ventilation area)
<b>Airflow Resistance</b>	

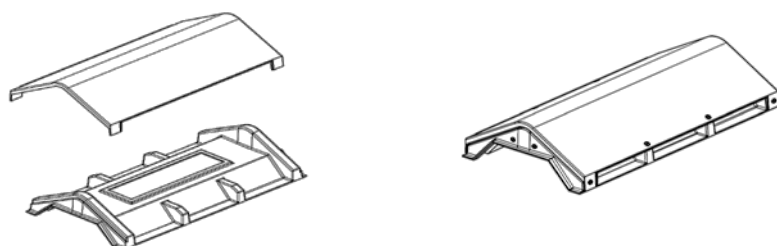

Ridge profile shown is for illustration purposes only