

The Ariel logo features a stylized white arrow pointing right, positioned above the word "ariel" in a bold, lowercase, sans-serif font. A registered trademark symbol (®) is located to the right of the word.The Liteglaze logo consists of a stylized white arrow pointing right, positioned above the word "Liteglaze" in a bold, sans-serif font. The "i" in "Liteglaze" has a dot.

Clear Acrylic Sheet Exterior Grade

# Energy Saving Secondary Glazing

## Installation Guide

Save energy with cost-effective secondary glazing and reduce heat loss through old or draughty windows.

The 2-part Liteglaze glazing strips are used with **Liteglaze acrylic sheet in 2mm and 4mm thicknesses** and the back glazing strip comes with peel-back adhesive tape for fixing to window frames.




## Installation

How to install secondary glazing




1

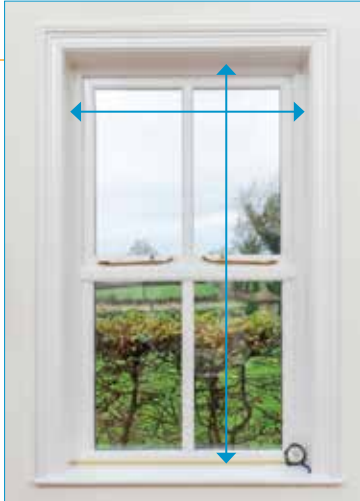

Measure opening to be glazed

2

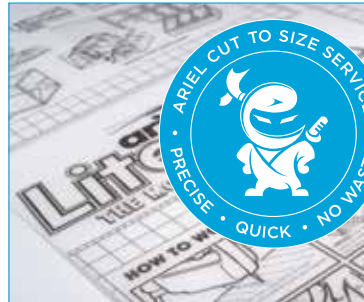

Calculate glazing size by deducting 15mm from each side of opening (30mm from vertical and 30mm from horizontal dimensions)

3



Cut glazing strips to size using a small hacksaw

4



Mitre the corners

5



Peel back adhesive strip from back glazing strip

6



Apply back glazing strips to window frame. For larger windows, it is recommended that glazing strips are also screw fixed.

7



Remove masking films

8



Place sheet in glazing strips

9



Cover with **snap-on** front glazing strips