


Ref. Code: AP051

Date: April 2016

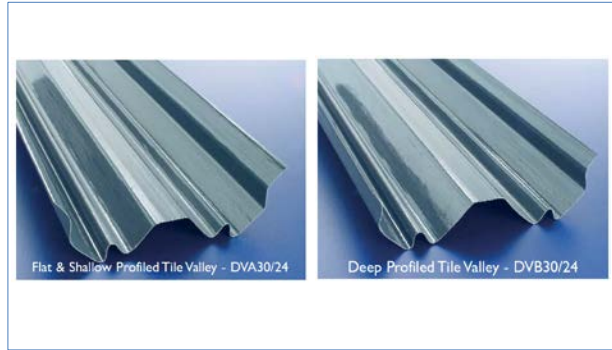

Corodrain Dry Valley

Product Features

Corodrain valley troughs are a durable alternative to lead.

- Mortar free dry fix valley
- BBA Approved Cert. No. 89/2153
- UV light and acid rain resistant
- Similar in appearance to lead
- At least as durable as lead
- Less prone to theft
- Quick to install
- Smooth surface inhibits the growth of moss & lichen and build-up of debris
- Fire resistant to SAB to BS476 part 3 and Class 3 to BS476 part 7

- For use on roofs with pitches from 22.5° to 49° degrees
- Can accommodate a maximum difference between two rafter pitches of 10°

Accessories


Profiled foam fillers

- DVA-EF – Flat and shallow profiled tiles
- DVB-EF – Deep profiled tiles


Self-adhesive tile support foam – Strip of 20

- DV-TS20

Product Specification	Flat & Shallow Profiled Tiles	Deep Profiled Tiles
Length and Code	2.4m – DVA24 , 3m – DVA30	2.4m – DVB24 , 3m – DVB30
Width	330mm	355mm
Standard Weight	1.64Kg/m ²	1.64Kg/m ²
Thickness	1.3mm	1.3mm
Colour	Grey/Blue	Grey/Blue
Material	GRP - High quality unfilled polyester resin with glass fibre reinforcement	GRP - High quality unfilled polyester resin with glass fibre reinforcement

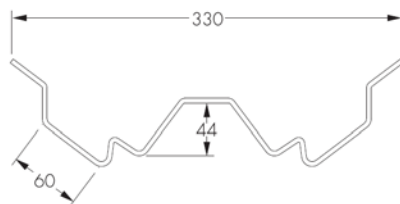

DVA – shallow dry fix valley

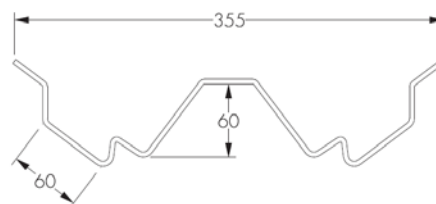

DVB – deep dry fix valley